


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 24 TOWNSHIP 14 RANGE 4
DATE: 12-02-99
PARTY CHIEF: Wilcoxen
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 10-5-94

IN. S.P.C. E ZONE, NAD 83
NAME: 14042403
N: 488939.4824(m)
E: 69213.1503(m)

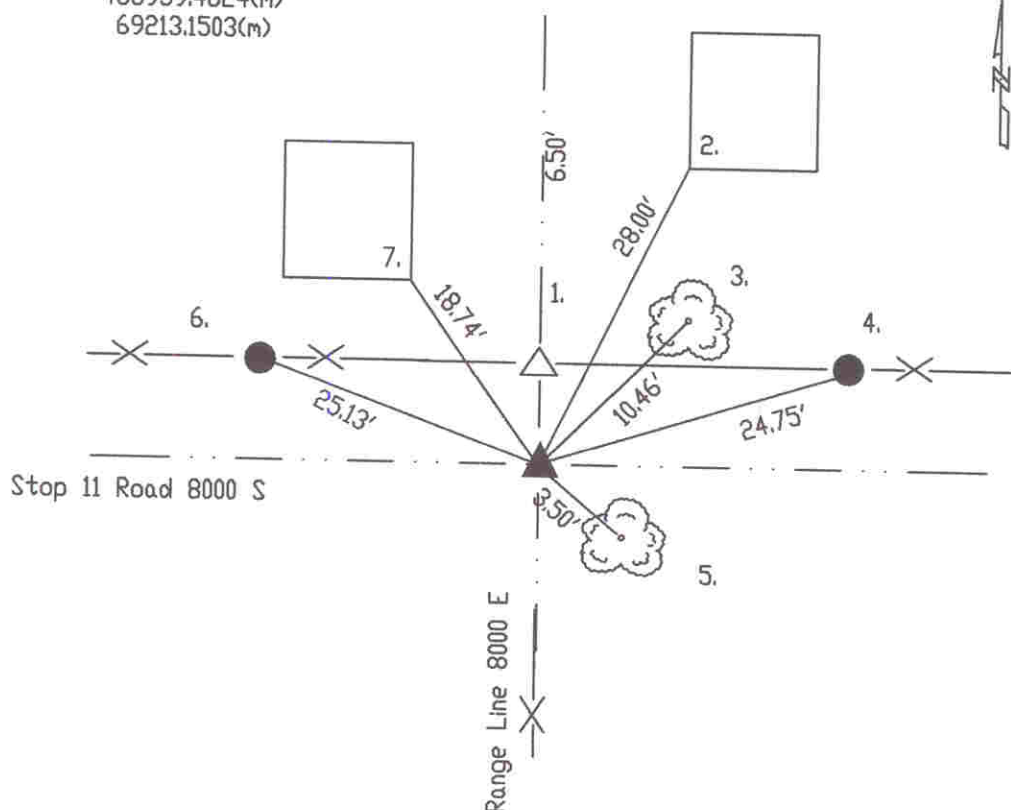

Original post set 1821 by Hendricks with witnesses: 8" lynn S 50 E 8 links, 14" beech N 81 no distance recorded per Marion County Atlas pg. 9. Hosbrook 2-10- & 11-1852 called witnesses: 10" beech S 14 E 32 links, 10" beech N 78 E 31 links per Franklin Township Legal Survey Book pg. 28. No noted type of monument set or recorded, 2-13-70 called stone above ground, 12-18-74 called the same. NOTE: corner "double" corner and lies 6.50'S. Ties 7-15-75 called the same. Excavated 6-21-85 and Harrison set. Re-tied 10-5-94 by Wilcoxen. Re-tied 12-02-99 by Wilcoxen.

HC442403

REF.	DISTANCE	DESCRIPTION
1.	6.50'	Due N to SW corner 18-14-5 (Harrison)
2.	28.00'	SW corner of siding for mini-barn
3.	10.46'	PK nail S 10° mple 12'up
4.	24.75'	1 1/2" steel pin
5.	3.50'	Railroad spike in N 24° ash 12'up
6.	25.13'	1 1/2" steel pin
7.	18.74'	SE corner of wooden mini-barn